



Harmony Timer Relays

Near Field Communication and
conventional Timer Relays



Harmony

Discover **Harmony**

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- **Harmony** Push Buttons and Switches
- **Harmony** HMI Operator Terminals, IPC and EdgeBox
- **Harmony** Signaling Devices
- **Harmony** Electrical Relays
- **Harmony** Safety

Life Is **On**

Schneider
Electric


Quick access to product information

Get technical information about your product

References

Modicon TM3 I/O expansion modules for Modicon controllers
Analog I/O modules


References	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	10 000 or 10 000 + sign	0 580.2	TM3A201	0.150
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 000 or 11 000 + sign	0 580.2	TM3A401	0.200
8 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	Thermopile (I) I, K, R, S, E, T, N, E, C Temperature (C) PT100, PT500, PT1000 0...+10 VDC 0...20 mA / -20 mA	10 000 or 10 000 + sign	3 510.15	TM3A801	0.200
4 differential temperature inputs	Thermopile (I) I, K, R, S, E, T, N, E, C 0...+10 VDC 0...20 mA / -20 mA	10 000 or 10 000 + sign	3 510.15	TM3A802	0.200
8 voltage/current	-10...+10 VDC	12 000 or 11 000 + sign	0 580.2	TM3A803	0.200

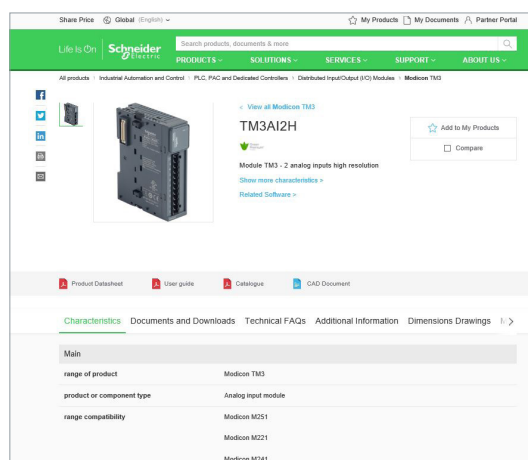


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

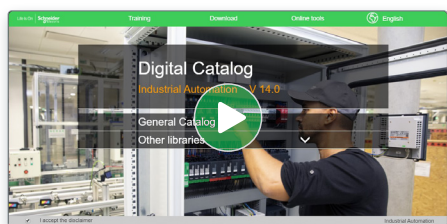

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

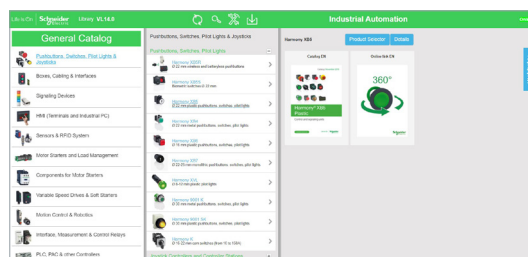


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

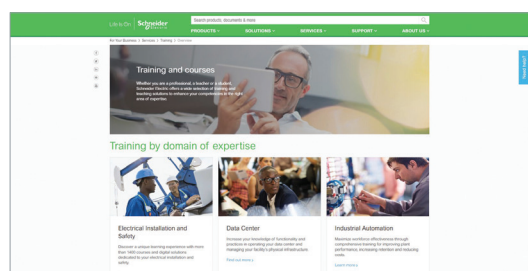

Life Is On

Schneider Electric

General contents

Harmony Timer Relays

■ General Presentation	page 2
□ Harmony RE22 Timing relays	page 2
□ Harmony NFC Timing relays.....	page 3
Selection guide	page 4
■ Presentation	page 6
■ Definitions	page 7
■ Selection table	page 8
■ Functions	page 10
■ References	page 23
□ Modular timing relays, solid state or relay output, width 17.5 mm/ <i>0.689 in.</i>	page 23
□ NFC timing relays with relay output.....	page 23
□ Modular timing relays with diagnostic button and dial pointer, relay output, width 22.5 mm/ <i>0.886 in.</i>	page 24
□ Modular timing relays, relay output, width 22.5 mm/ <i>0.886 in.</i>	page 25
□ Miniature plug-in timing relays, relay output.....	page 26
□ Electronic timing relays, relay output, 48 x 48 mm	page 27
■ Product reference index	page 28

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Harmony Timer Relays

Innovative, ergonomic and configurable offer with single or multifunction types

Harmony Timer are timing relays designed to time events in industrial automation systems by closing and opening contacts before, during, or after a set time period. They are designed for hard-wired logic automated systems to complement the functions of industrial programmable logic controllers (PLCs).

They are suitable for a wide range of applications, including:

- Machines: single machine, and industrial automation and processes
- Buildings: lighting control, access control door locks, roller shutters
- Water segment: pumping and irrigation systems
- HVAC: fans and centralized water systems

Depending on the product model, these relays support multiple time ranges.

> Modular DIN rail mounted timing relays



RE17, RENF, RE22

> Miniature plug-in timing relays



REXL

> Panel mounted/plug-in timing relays



RE48A

The Harmony Timer relays also feature:

- Wide power supply range from 24 to 240 V $\bar{\sim}$
- Single or multi timing ranges from 0.02 s to 999 hrs
- Screw or spring connection terminals
- Relay or solid-state output
- Conformity to IEC 61812-1 and EN 61812-1 standards
- UL, CSA, GL, RCM, EAC, CCC, and China ROHS compliance
- Easy to set up with wiring diagrams on the side of the product

Harmony RE22 Timing relays

Modular relays with unique features

- > Innovative: dial pointer LED indicator and diagnostic button to assist setup and troubleshooting
- > Compact and reliable
- > Energy efficient: simple to implement, operate, and maintain
- > Compliance with standards and certifications
- > QR code embedded in instruction sheet for easy setup



Dial pointer LED indicator

Diagnostic button

Harmony Timer Relays → A complete range of reliable and flexible offers

Harmony NFC Timing Relay: As simple as

- 1 Install
- 2 Open app
- 3 Set parameters

Harmony NFC Timing Relays

The NFC timing relay is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period.

The mobile app, Ecostruxure Industrial Device, created for NFC timing relay is Android and iOS enabled and can be downloaded on the phone from Google Play Store or Apple Store.

Simplify product selection


- > One product reference
- > 28 timing functions
- > 2 outputs
- > Wide range of voltage supplied (24...240 V ~~/~)

Achieve unprecedented accuracy

- > Digitized setting eliminate the need for screw driver
- > Timing can be set by hour, minute, second, or millisecond



Select Function

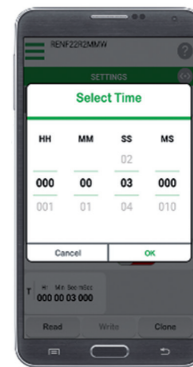

Select Time

Diagnose your relay

- > Read relay status
- > Overwrite the output
- > Manage relays without power

Security

- > Four-digit password protection



Diagnose



Security setting

Save valuable time

- > Clone settings
- > Store settings
- > Share settings through SMS

Harmony NFC Timing Relay → World's first industrial NFC timing relay

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Applications	These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.			
Output	Solid state Timing relays with solid state output reduce the amount of wiring required (wired in series). The durability of these timing relays is independent of the number of operating cycles.		Relay Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits.	



Type	Modular and DIN rail mounted			
Connection	Screw type	Spring type	Screw type	Spring type
Time ranges	□ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h		Depending on model: □ 6 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h □ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	
Timer Relay type	RE17L●●●	RE17L●●●S	RE17R●●●	RE17R●●●S
Pages	23		23	

These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.			
Relay Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits.			



Modular and DIN rail mounted		Miniature and plug-in	Analogue and panel-mounted/plug-in
Screw type			
0.05 s to 999 h	Depending on model: □ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h □ 7 ranges: 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 10 min □ 7 ranges: 0.5 s 1 s 3 s 10 s 30 s 100 s 300 s □ 1 range: 30 s □ 10 ranges: 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h		□ 7 ranges: 0.1 s...1 s, 1 s...10 s, 0.1 min...1 min, 1 min...10 min, 0.1 h...1 h, 1 h...10 h, 10 h...100 h
RENF	RE22	REXL	RE48A
23	24	26	27

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

DIN rail mounted timing relays




RE17

RENF

RE22

Miniature plug-in timing relays with sockets

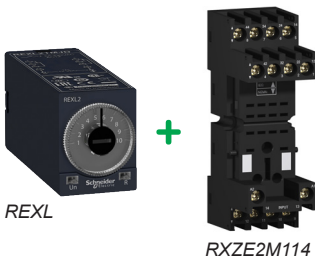


REXL

RXZE2M114

Panel-mounted/plug-in timing relays



RE48A

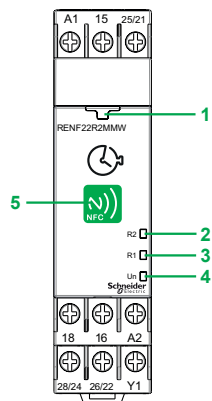

Harmony NFC Timing Relay



Harmony NFC timing relay with Smartphone mobile app

Presentation

A timing relay is a component that is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period. There are three main families of timing relays:

- DIN rail mounted Modular relays (**RE17**, **RENF**, and **RE22**) designed for mounting on DIN rails in an enclosure
- Miniature plug-in relays (**REXL**) designed to be plugged into sockets
- Panel mounted/plug-in relays (**RE48A**) designed for mounting on the front panel to give users easy access to the settings

These relays have 1, 2, or 4 outputs. For some references from RE22 and RE48 range, the second output can be either timed or instantaneous. If the power is switched off during the timing period, the relay reverts to its initial position.

The Harmony Timer simple-to-use innovative NFC timing relay is enabled and controlled by the Near Field Communication technology available in present-day smartphones.

Application examples:

- opening of automatic doors
- alarm
- lighting in toilets
- car park barriers, etc.

Harmony NFC timing relay description

- 1 Pairing indication LED (Green)
- 2 Output 2 indication LED (Amber)
- 3 Output 1 indication LED (Amber)
- 4 Power supply indication LED (Green)
- 5 NFC antenna location

Harmony NFC timing relay mobile application

To use the NFC timing relay, you must use a mobile device equipped with Android OS v7.0 and above or iOS v14.5 and above.

Using the mobile, scan the QR code below or search for the “Ecostruxure Industrial Device” application on the Google Play Store or Apple Store. Refer to the [Instruction Manual](#) for more information.



With the app installed in your mobile device, you can retrieve/configure and lock/unlock the product settings, and diagnose product status. All related timing function diagrams, wiring diagram and help contents can be obtained from the app.




Note: The default function for NFC Timer product is Function A (Power on-delay) and T=3s.

Definitions

The following definitions explain relay operation:

■ **Relay output:**

This is the most common type of output. When the relay is energized, the moving armature is attracted by the coil and so actuates the contacts, which change state. When the relay is de-energized, both the armature and the contacts revert to their initial position. This type of output allows complete isolation between the power supply and the output. There are three types of output contact:

CO: Changeover contact, i.e. when the relay is de-energized, the circuit between the common point C and NC is closed and when the relay is operating (coil energized), it closes the circuit between the common point C and the NO contact.	
NC: A contact that is closed without being actuated is called a Normally Closed (NC) contact.	
NO: A contact that closes when actuated is called a Normally Open (NO) contact.	

■ **Solid state output:**

This output is entirely electronic and involves no moving parts; service life is therefore increased.

■ **Breaking capacity:**

The current value that a contact is capable of breaking in specified conditions.

■ **Mechanical durability:**

The number of mechanical operating cycles of the contact or contacts.

■ **Minimum switching capacity** (or minimum breaking capacity):

This is the minimum required current that can flow through the contacts of a relay.

■ **X1/X2/Y1/Gate control input:**

Control input allows timing in progress to be interrupted without it being reset.

Functions

Timing functions are identified by letters. For the complementary functions, select the main timing function using the selection dial in the front panel; refer to functional diagrams for connection.

Main timing functions	Complementary functions (1)	Definitions
A (2)		Power on-delay relay
	Ac	On-delay and off-delay relay with control signal
	Act	On-delay and off-delay relay with control signal and pause/summation control signal
	Ad	Pulse delayed relay with control signal
	Ah	Pulse delayed relay (single cycle) with control signal
	Ak	Asymmetrical on-delay and off-delay relay with control signal
	Akt	Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal
	At	Power on-delay relay with pause/summation control signal
	Aw	Power on-delay relay with retrigger/restart control signal
B (2)		Single interval relay with control signal
	Bw	Double interval relay with control signal
C (2)		Off-delay relay with control signal
	Ct	Off-delay relay with control signal and pause/summation control signal
D (2)		Symmetrical flashing relay (starting pulse-off)
	Di (2)	Symmetrical flashing relay (starting pulse-on)
	Dit	Symmetrical flashing relay (starting pulse-on) with pause/summation control signal
	Diw	Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal
	Dt	Symmetrical flashing relay (starting pulse-off) with pause/summation control signal
	Dw	Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal
H (2)		Interval relay
	He	Pulse-on de-energization
	Ht	Interval relay with pause/summation control signal
	Hw	Interval relay with retrigger/restart control signal
K		Delay on de-energization (without auxiliary supply)
L (2)		Asymmetrical flashing relay (starting pulse-off)
	Li (2)	Asymmetrical flashing relay (starting pulse-on)
	Lit	Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal
	Lt	Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal

(1) Complementary functions enhance the main timing functions.
Example: **Ac**: timing after closing and opening of control contact.

(2) The most commonly used timing functions.

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Definitions (continued)		
Main timing functions	Complementary functions (1)	Definitions
N		Safe-guard relay
O		Delayed Safe-guard relay
P		Pulse delayed relay with fixed pulse length
	Pt	Pulse delayed relay with fixed pulse length and pause/summation control signal
Q		Star-delta relay (2 NO outputs with same common)
	Qc	Star-delta relay (1 CO output)
	Qe	Star-delta relay (1 NC + 1 NO outputs with split common)
	Qg	Star-delta relay (2 CO outputs with same common)
	Qgt	Star-delta relay (2 CO outputs with same common) with pause/summation control signal
	Qt	Star-delta relay (2 CO outputs with split common)
	Qtt	Star-delta relay (2 CO outputs with split common) with pause/summation control signal
	T	TI
Tt		Retriggerable bistable relay with control signal on
W		Interval relay with control signal off
	Wt	Interval relay with control signal off and pause/summation control signal

Selection table

Selection criteria

- **Functions** (on-delay or off-delay, counter, flashing, etc.)
- **Supply voltage** (example: $\approx 12\text{ V} \dots 240\text{ V}$)
- **Timing range** for a timing relay (for example; 0.05 s... 100 h)
- **Type of output** (contact or solid state) and required **Number of contacts**
- **Rated current** or **Breaking capacity** of contacts, expressed in Amperes. This is the maximum current that may flow through the contacts.

Functions	Timing range	Supply voltage	Type of output	Rated current	Relay		
A	0.1 s...100 h	$\approx 12\text{ V}$	2 CO contacts	5 A	REXL2TMJD		
			4 CO contacts				
		$\approx 24\text{ V}$	2 CO contacts		REXL2TMBD		
			4 CO contacts		REXL4TMBD		
		$\sim 24\text{ V}$	2 CO contacts		REXL2TMB7		
			4 CO contacts		REXL4TMB7		
		$\sim 120\text{ V}$	2 CO contacts		REXL2TMF7		
			4 CO contacts		REXL4TMF7		
		$\sim 230\text{ V}$	2 CO contacts		REXL2TMP7		
			4 CO contacts		REXL4TMP7		
		$\approx 24 \dots 240\text{ V}$	1 solid state output	0.7 A	RE17LAMW		
					RE17LAMWS		
			0.02 s...300 h	$\approx 24 \dots 240\text{ V}$	2 CO contacts	5 A	RE48ATM12MW
		A, Ac, At, B, Bw, C, D, Di, H, Ht	0.1 s...100 h	$\approx 24 \dots 240\text{ V}$	1 solid state output	0.7 A	RE17LMBM
1 CO contact	8 A				RE17RMJU		
$\approx 12\text{ V}$					RE17RMMW		
					RE17RMMWS		
$\approx 24\text{ V} / \sim 24 \dots 240\text{ V}$					RE17RMMU		
					RE17RMMUS		
	2 CO contacts					RE22R2MMU	
						RE22R2MJU	
$\approx 12\text{ V}$						RE22R2MMW	

(1) Complementary functions enhance the main timing functions.
 Example: **Ac**: timing after closing and opening of control contact.
Note: References ending with "S" are spring terminals; references without "S" are screw terminals.
 Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal.

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Selection table (continued)								
Functions	Timing range	Supply voltage	Type of output	Rated current	Relay			
A, At	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RAMU			
			2 CO contacts		RE17RAMUS RE22R2AMU			
A, Aw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1AMR			
			2 CO contacts		RE22R2AMR			
A, At, Aw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MAMR			
A, At, B, C, D, Di, H, Ht	0.1 s...10 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RMEMU			
					RE17RMEMUS			
A, B, C, Di	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48AML12MW			
A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Dit, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, TI, Tt, W	0.05 s...999 h	≈ 24...240 V	2 CO contacts	8 A	RENF22R2MMW			
A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2MYMR			
A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt, Ac, Act	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MYMR			
A1, A2, H1, H2	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48AMH13MW			
Ac	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2ACMR			
Ac, Act	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1ACMR			
Ad, Ah, N, O, P, Pt, TI, Tt, W	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RMXMU			
					RE17RMXMUS			
			2 CO contacts	8 A	RE22R2MXMU			
Ak, Akt	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1AKMR			
B	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RBMU			
C	0.1 s...100 h	∼ 24...240 V	1 solid state output	0.7 A	RE17LCBM			
					RE17LCBMS			
					RE17RCMU			
		≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RCMUS			
	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2CMR			
C, Ct	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1CMR			
D, Dw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1DMR			
			2 CO contacts		RE22R2DMR			
H	0.1 s...100 h	∼ 24...240 V	1 solid state output	0.7 A	RE17LHBM			
H, Hw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1HMR			
			2 CO contacts		RE22R2HMR			
H, Ht	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RHMU			
					RE17RHMUS			
K	0.05 s...10 min	≈ 24...240 V	1 CO contact	5 A	RE22R1KMR			
			2 CO contacts		RE22R2KMR			
K, He	0.05 s...300 s	≈ 24...240 V	1 CO contact	5 A	RE22R1MKMR			
L, Li	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE17RLMU			
					RE17RLMUS			
					∼ 24...240 V	1 solid state output	0.7 A	RE17LLBM
					RE17LLBMS			
		≈ 12 V	1 CO contact	8 A	RE17RLJU			
	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48ACV12MW			
L, Lt, Li, Lit	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MLMR			
Q	0.1 s...100 h	≐ 24 V/∼ 24...240 V	1 CO contact	8 A	RE22R1QMU			
		∼ 230...240 V, ∼ 380...440 V			RE22R1QMQ			
Qc	0.05 s...300 s	≈ 24 V, ∼ 24...240 V	1 CO contact	8 A	RE22R1QCMU			
Qe	0.3 s...30 s	∼ 380...415 V	2 CO contacts	8 A	RE22R2QEMT			
		≈ 24...240 V			RE22R2QEMR			
Qg	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2QGMR			
Qt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2QTMR			
W, Wt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2MWMR			

Note: References ending with "S" are spring terminals; references without "S" are screw terminals.


Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal.

Functions

U: Supply
 R: Relay or solid state output
 R1/R2: 2 timed outputs
 R2 inst.: Second output is instantaneous if the correct position is selected
 T: Timing period

X1/X2/Y1: Control contacts
 Ta: Adjustable on-delay
 Tr: Adjustable off-delay

Function diagram:

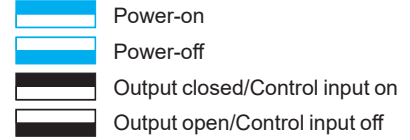


Function A: Power on-delay relay

1 output



2 outputs

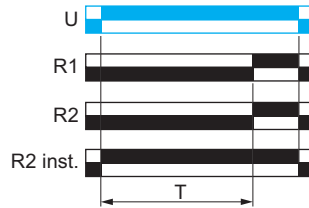


The timing period T begins on power-on.

At the end of this timing period, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Ac: On-delay and off-delay relay with control signal

1 output

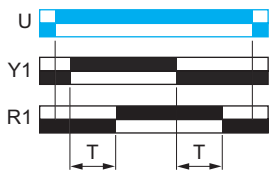

2 outputs

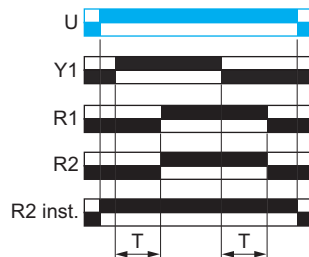

After power-on, and the closure of Y1 the timing period T starts.

At the end of this timing period, the output(s) R close(s).


When Y1 opens, the timing period T starts.

At the end of this timing period T, the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Act: On-delay and off-delay relay with control signal and pause/summation control signal

1 output

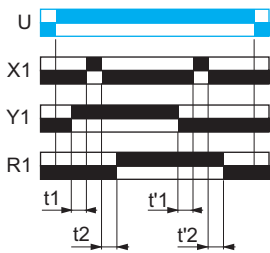

After power-on and the closure of Y1 the timing period T starts and it can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

When Y1 opens, the timing T starts and it can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

$$T = t_1 + t_2 + \dots$$


$$T = t'_1 + t'_2 + \dots$$

Function Ad: Pulse delayed relay with control signal

1 output

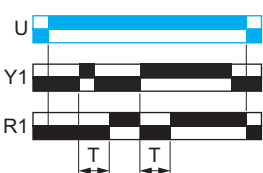

2 outputs

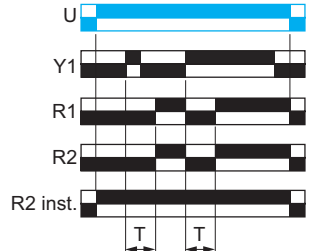

After power-on, pulsing or maintaining Y1 starts the timing T.

At the end of this timing period T, the output(s) R close(s).


The output(s) R will revert to its/their initial position the next time Y1 is pulsed or maintained.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function Ah: Pulse delayed relay (single cycle) with control signal

1 output

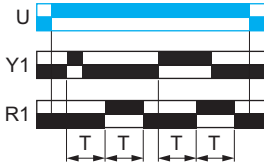

2 outputs

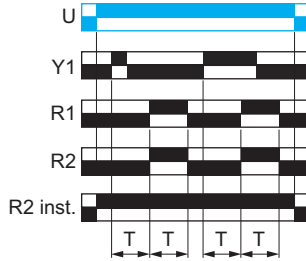


After power-on, pulsing or maintaining control contact Y1 starts the timing T. A single cycle then starts with 2 timing periods T of equal duration (start with output(s) R in initial position).

The output(s) R closes (s) state at the end of the first timing period T and reverts to its/their initial position at the end of the second timing period T. Control contact Y1 should be reset in order to re-start the single flashing cycle.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Ak: Asymmetrical on-delay and off-delay relay with control signal

1 output

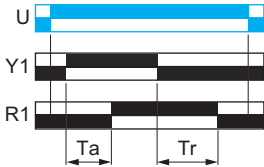

2 outputs

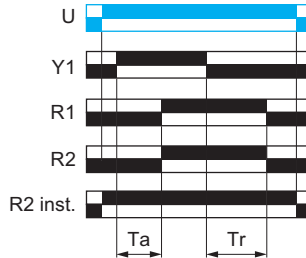

After power-on and the closure of control contact Y1, timing starts for a period Ta.


At the end of this timing period Ta, the output(s) R close(s).

A second timing period Tr starts when control contact Y1 re-opens. At the end of this timing period Tr, the output R reverts to its initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Akt: Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal

1 output

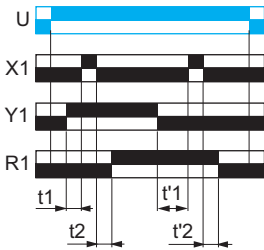

$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$


After power-on and the closure of Y1, timing starts for a period Ta and can be interrupted/paused each time X1 closes. When the cumulative total time elapsed reaches the preset value Ta, the output R closes.

A second timing period Tr starts when Y1 re-opens and can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value Tr, the output R open(s).

Function At: Power on-delay relay with pause/summation control signal

1 output

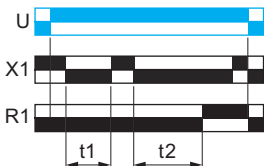


$$T = t_1 + t_2 + \dots$$

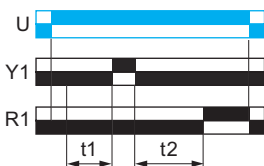


$$T = t_1 + t_2 + \dots$$

2 outputs

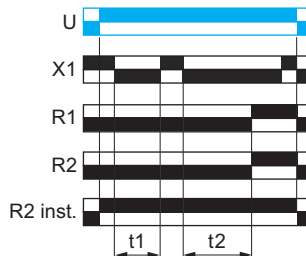

$$T = t_1 + t_2 + \dots$$

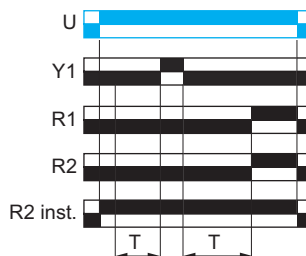

$$T = t_1 + t_2 + \dots$$

After power-on, the timing period T starts. Timing can be interrupted/paused each time X1 closes.

Note: For RENF22R2MMW, RE17●, RE22R2AMU, RE22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function Aw: Power on-delay relay with retrigger/restart control signal

1 output

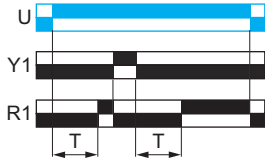

2 outputs

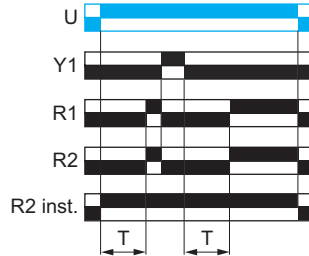


The timing period T starts on power-on. At the end of the timing period T, the output(s) R close(s).

Closing of the Y1 makes the output(s) R open. Opening of Y1 restarts timing period T. At the end of the timing period T, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function B: Single Interval relay with control signal

1 output

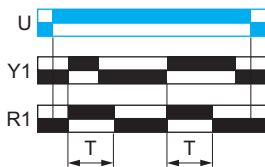

2 outputs

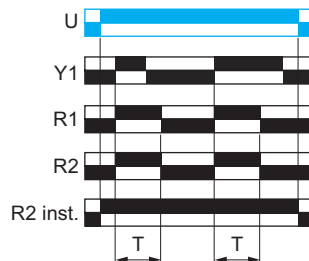


After power-on, pulsing or maintaining Y1 starts the timing T.

The output(s) R close(s) for the duration of the timing period T and then open(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Bw: Double interval relay with control signal

1 output

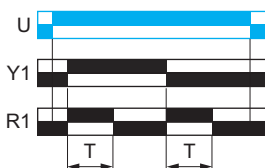

2 outputs

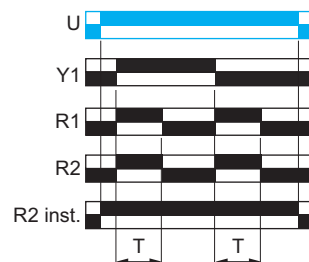


After power-on, transition of Y1 (either from open to closed or vice-versa) will cause the output(s) R to close(s) for the duration of the timing period T and then revert(s) to its/their initial state.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function C: Off-delay relay with control signal

1 output

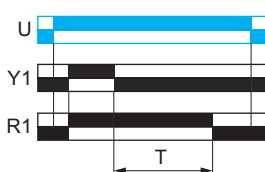

2 outputs

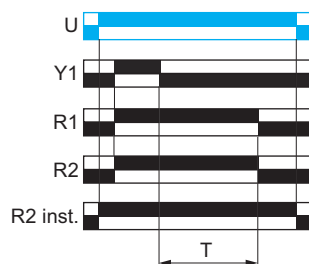

After power-on and closure of the Y1, the output(s) R close(s).


When Y1 re-opens, timing T starts.

At the end of the timing period, output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Ct: Off-delay relay with control signal and pause/summation control signal

1 output

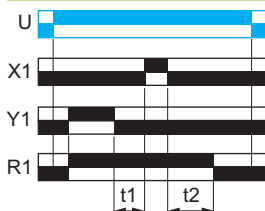

$$T = t_1 + t_2 + \dots$$

2 outputs

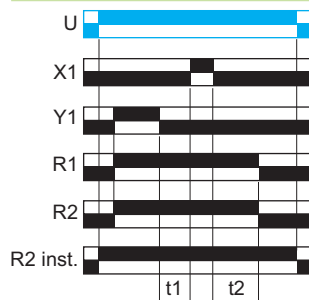

$$T = t_1 + t_2 + \dots$$

After power-on and the closure of Y1, the output(s) R close(s).

When Y1 re-opens, timing starts and can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Functions (continued)

Function D: Symmetrical flashing relay (starting pulse-off)

1 output



2 outputs

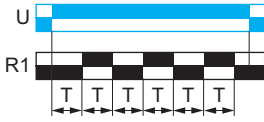

After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

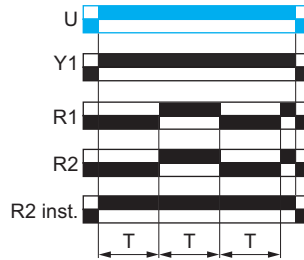
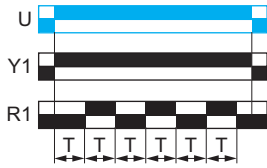


Note: Function D with Y1 is only for the RE17 range and RE22R2MJU, RE22R2MMU, and RE22R2MMW references.

Function Di: Symmetrical flashing relay (starting pulse-on)

1 output

2 outputs

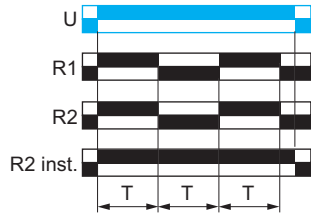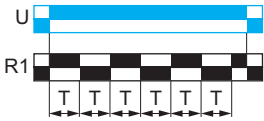

After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.


This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Dt: Symmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output

2 outputs

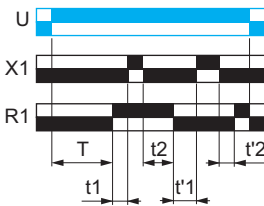

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

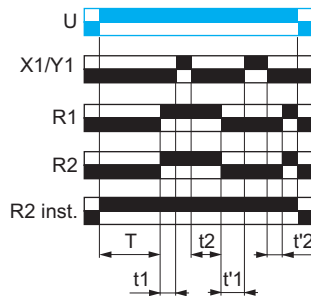

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/their initial state for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The output(s) R will remain in the closed state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Note: For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.


Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Functions (continued)

Function D1t : Symmetrical flashing relay (starting pulse-on) with pause/summation control signal


1 output

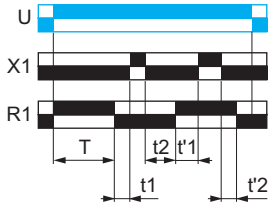

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

2 outputs

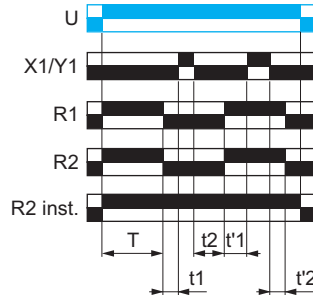

$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) when output(s) R close(s) for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, then the output(s) revert(s) to its/their initial state.

The output(s) R will remain in this initial state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s). This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Note: For RNF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function Dw: Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal

1 output

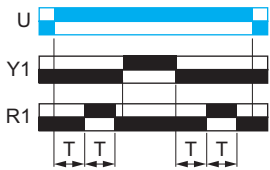

2 outputs

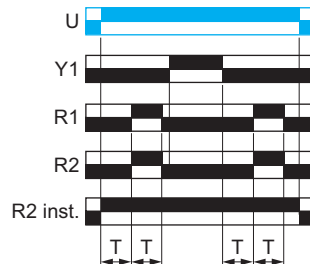

After power-on, output(s) R start(s) with open state for timing period T then close(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.

At any state of the output(s) R, when Y1 closes and then re-opens, the output(s) R open(s) and restart(s) the same operation as described at the beginning.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Diw: Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal

1 output



2 outputs

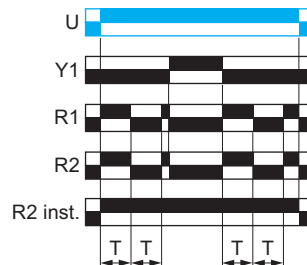

After power-on, output(s) R closes(s) for timing period T and open(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.


At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function H: Interval relay

1 output

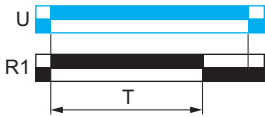

2 outputs

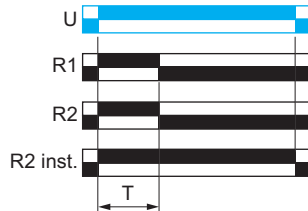


After power-on, timing period T starts and the output(s) R close(s).

At the end of the timing period T, output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function He: Pulse-on de-energization

1 output

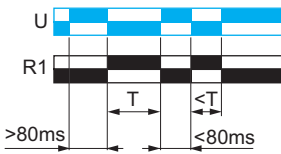


After power-on > 80 ms followed by power-off, the output R closes for the duration of a timing period T and then open(s).

After power-on < 80 ms followed by power-off, the output R closes and opens before the end of the timing period T as it will not be able to sustain this state for the timing period T.


Function Ht: Interval relay with pause/summation control signal

1 output



$$T = t_1 + t_2 + \dots$$

2 outputs




$$T = t_1 + t_2 + \dots$$

After power-on, output(s) R close(s) and timing period T starts, the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Note: For RE17●, RE22R2MMW, RENF22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.




$$T = t_1 + t_2 + \dots$$




$$T = t_1 + t_2 + \dots$$

Function Hw: Interval relay with retrigger/restart control signal

1 output

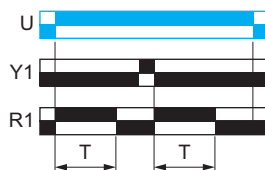

2 outputs

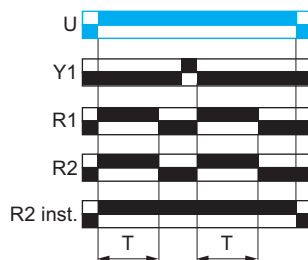

After power-on, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R open(s).


At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function K: Delay on de-energization (without auxiliary supply)

1 output

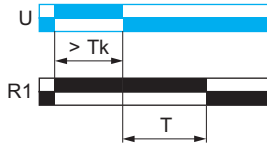

2 outputs

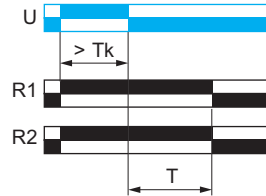

After power-on, the output(s) R close(s).

After power-off, timing period T starts and, at the end of this period, the output(s) R open(s).


The power-on $> T_k$ is necessary to sustain the timing period T.

There are 3 references with different T_k as follows:


- (a) RE22R1KMR $\rightarrow T_k = 1\text{ s}$
- (b) RE22R2KMR $\rightarrow T_k = 1\text{ s}$
- (c) RE22R1MKMR $\rightarrow T_k = 80\text{ ms}$

Function L: Asymmetrical flashing relay (starting pulse-off)

1 output

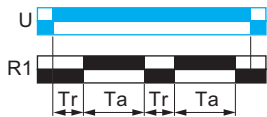

1 output

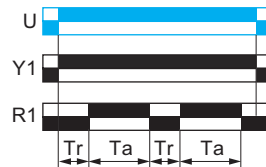


After power-on, repetitive cycle consisting of 2, independently adjustable timing periods T_a and T_r starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


2 outputs

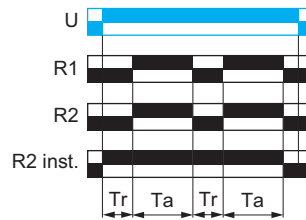

Note: Function L with Y1 is only for the RE17 range.

Function Li: Asymmetrical flashing relay (starting pulse-on)

1 output

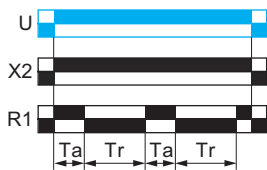

1 output




After power-on, repetitive cycle consisting of 2, independently adjustable timing periods T_a and T_r starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

2 outputs

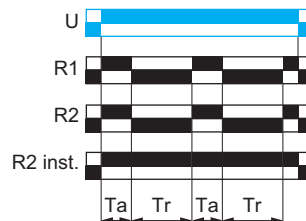


Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Functions (continued)

Function Lt: Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output

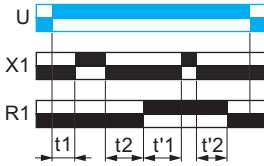

$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

2 outputs

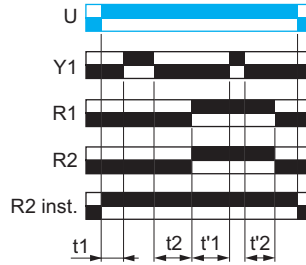

$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/ their initial state for timing duration T_r and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T_r , the output(s) R close(s).

The output(s) R will remain at its close state for timing duration T_a , and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T_a , then output(s) R reverts to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Lit: Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal


1 output

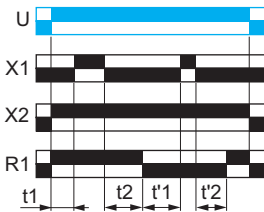

$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

2 outputs

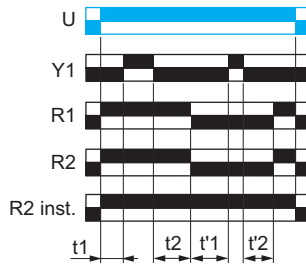

$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

After power-on, output(s) R close(s) for timing duration T_a and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T_a , the output(s) R open(s).

The output(s) R will remain open for timing duration T_r , the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T_r , then output(s) R close(s).

This cycle is repeated indefinitely until the power supply is removed.


Note: For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function N: Safe-guard relay

1 output

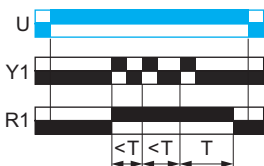

2 outputs

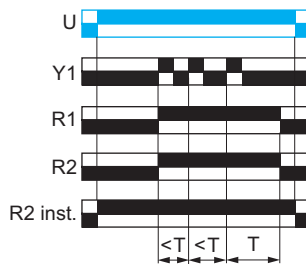

After power-on and at the beginning of the control pulse Y1, the output(s) R close(s).

If the interval between two Y1 control pulses is greater than the set timing period T, timing elapses normally and the output(s) R open(s) at the end of the timing period T.


If the interval is less than the set timing period, the output(s) R remain(s) closed until this condition is met.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function O: Delayed Safe-guard relay

1 output

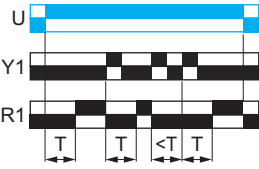

2 outputs

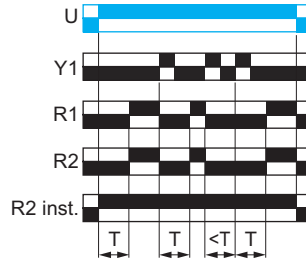

An initial timing period T begins on power-on. At the end of this timing period, the output(s) R close(s).


At the beginning of the control pulse Y1, the output(s) R opens(s) and remain(s) in that state if the interval between two control pulses is less than the value of the set timing period T.

Otherwise, the output(s) R close(s) at the end of the timing period T.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function P: Pulse delayed relay with fixed pulse length

1 output

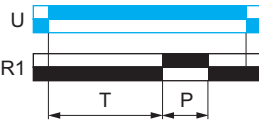

P = 500 ms

2 outputs

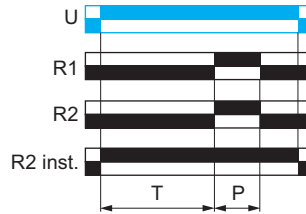


The timing period T starts on power-on.

At the end of this period, the output(s) R close(s) for a fixed time P and then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Pt: Pulse delayed relay with fixed pulse length and pause/summation control signal

1 output

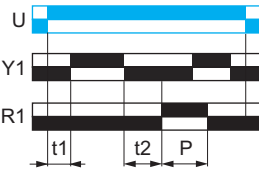

T = t1 + t2 + ...
P = 500 ms

2 outputs

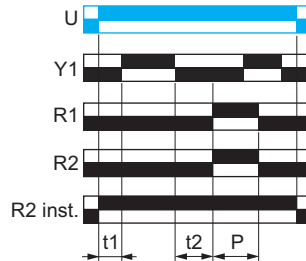


After power-on, timing period T starts (it can be interrupted by operating control contact Y1).

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s) for a fixed time P then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Q: Star-delta relay (2 NO outputs with same common)

2 outputs

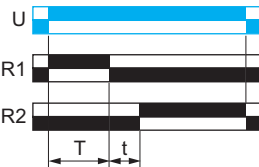

t = 20, 40, 60, 80, 100, 120, 140 ms selectable

After power-on, the output R1 closes such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).


At the end of the timing period T, the output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, the output R2 closes such that it closes the delta contactor.

Functions (continued)

Function Qc: Star-delta relay (1 CO output)

1 output

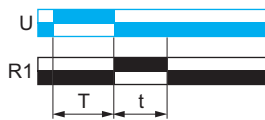

t = 50 ms


After power-on, the output R initializes at its initial state to close the star contactor and main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R reverts to its initial state such that it closes the delta contactor.

Function Qe: Star-delta relay (1 NC + 1 NO outputs with split common)

2 outputs

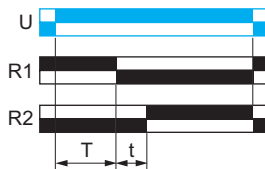


After power-on, the output R1 is at its initial state such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qg: Star-delta relay (2 CO outputs with same common)

2 outputs

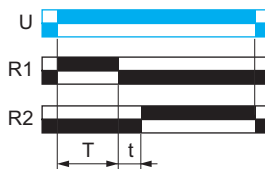

t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QGMR)


After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).

At the end of the timing period T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qt: Star-delta relay (2 CO outputs with split common)

2 outputs

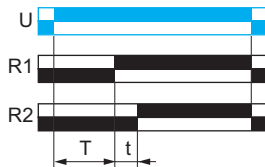

t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QTMR)

t = 50, 60, ...ms (RENF22R2MMW)

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (Star connection time duration starts).


At the end of the timing period T, the output R1 closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, the output R2 closes such that it closes the delta contactor.

Functions (continued)

Function Qgt : Star-delta relay (2 CO outputs with same common) with pause/summation control signal

2 outputs

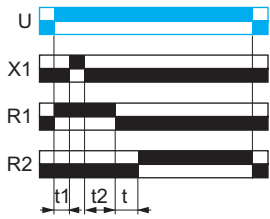

$T = t_1 + t_2 + \dots$
 $t = 50 \text{ ms}$

After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).


During star connection time, the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qtt : Star-delta relay (2 CO outputs with split common) with pause/summation control signal

2 outputs

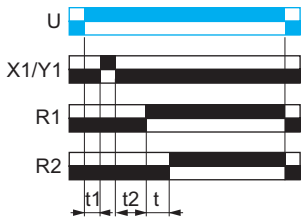

$T = t_1 + t_2 + \dots$
 $t = 50 \text{ ms}$
 $t = 50, 60, \dots \text{ms (RENF22R2MMW)}$

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (star connection timing period starts).

During star connection time, the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, output R1 closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.


Note: For RNF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function TI: Bistable relay with control signal on

1 output

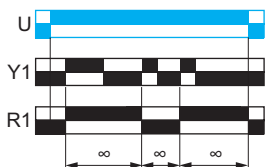

2 outputs

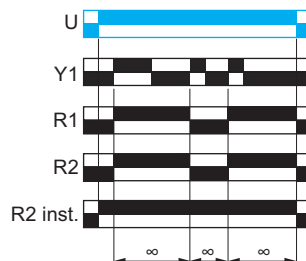

After power-on and closure of Y1, the output(s) R close(s). The subsequent closure of Y1 causes the output(s) R to revert(s) to its/their initial state.


This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function Tt: Retriggerable bistable relay with control signal on

1 output

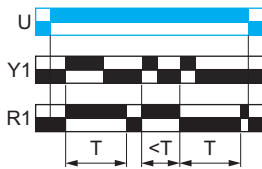

2 outputs

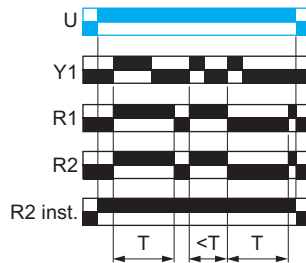

After power-on and closure of Y1, the output(s) R close(s) and the timing T starts.


If the interval between 2 consecutive closures of Y1 is greater than the preset value T, the output(s) R will toggle from its/their present state at the end of the timing period.

If the interval between 2 consecutive closures of Y1 is less than the preset value T, the output(s) R toggle from its/their present state as soon as Y1 closes without completing duration T.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function W: Interval relay with control signal off

1 output

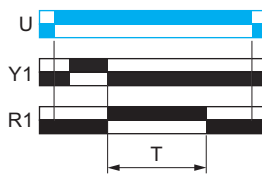

2 outputs

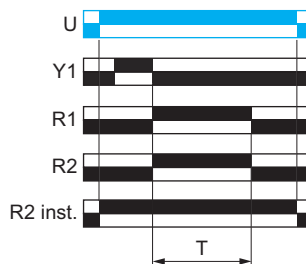


After power-on and closure of contact Y1, followed by opening of the control contact Y1, the output(s) R close(s) for a timing period T.

At the end of this timing period the output(s) revert to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Wt: Interval relay with control signal off and pause/summation control signal

1 output

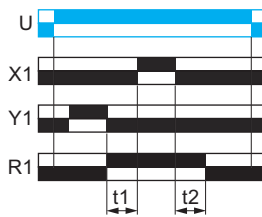

$$T = t_1 + t_2 + \dots$$

2 outputs

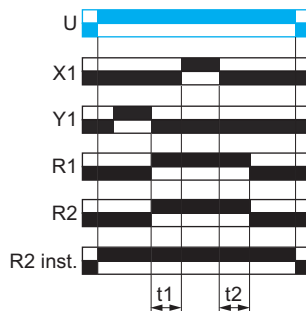


After power-on and at the end of control pulse Y1, the output(s) R close(s) for a timing period T. Timing can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


RE48ATM12MW

Function A: Power on-delay relay




RE48ACV12MW

Function L: Asymmetrical flashing relay (starting pulse-off)

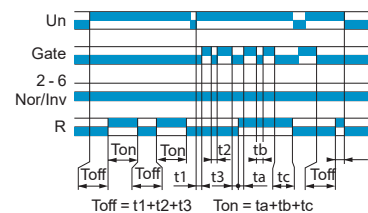


Function Li: Asymmetrical flashing relay (starting pulse-on)

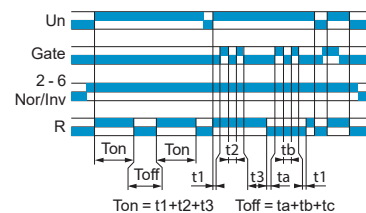


RE48AML12MW


Function A: Power on-delay relay

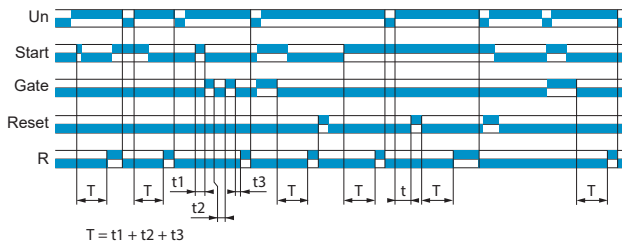


Function B: Interval relay with control signal

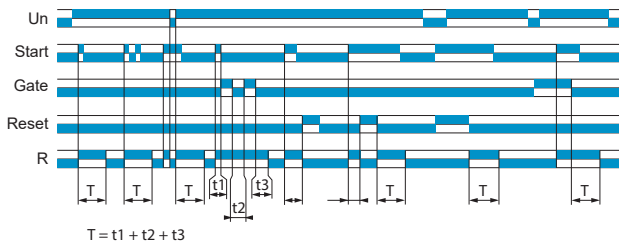

Function C: Off-delay relay with control signal

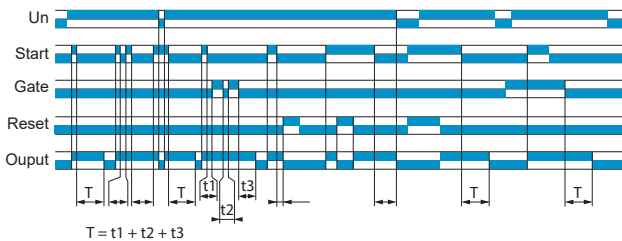

Function Di: Symmetrical flashing relay (starting pulse-on)

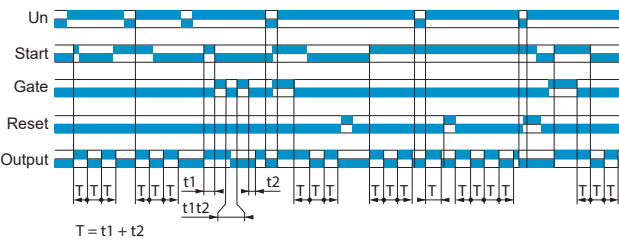


RE48AMH13MW

Functions A1, A2: Delay on energization



Functions H1, H2: Pulse-on energization

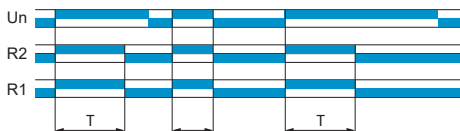

Note: If A1 or H1 is selected, only R2 is timed, R1 is instantaneous.

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Modular timing relays, solid state or relay output, width 17.5 mm/0.689 in.

Solid state output

- Multifunction, dual function, or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- Solid state output: 0.7 A
- Screw and spring terminals



RE17LAMW



RE17LCBMS

Relay output, 1 CO contact

- Dual function or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- 1 relay output: 8 A
- Screw and spring terminals
- State indication by 1 LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE17RAMU



RE17RMMWS

2 CO contacts

- Multifunction
- Multiple timing ranges
- Multivoltage
- 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RENF22R2MMW

Modular timing relays with solid state output

Single function

Timing ranges	Functions	Voltages V	Reference	Weight kg/lb
1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A	~ 24...240	RE17LAMW RE17LAMWS	0.060/0.132 0.050/0.110
	H	~ 24...240	RE17LHBM	0.060/0.132
	C	~ 24...240	RE17LCBM RE17LCBMS	0.060/0.132 0.050/0.110

Dual function

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	L, Li	~ 24...240	RE17LLBM RE17LLBMS	0.060/0.132 0.050/0.110
--	-------	------------	---	----------------------------

Multifunction

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, D, Di, Ac, Bw	~ 24...240	RE17LMBM	0.060/0.132
--	-----------------------------------	------------	--------------------------	-------------

Modular timing relays with relay output

Single function

Timing ranges	Functions	Voltages V	Reference	Weight kg/lb
1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	B	~ 24/~ 24...240	RE17RBMU	0.070/0.154
	C	~ 24/~ 24...240	RE17RCMU RE17RCMUS	0.070/0.154 0.060/0.132

Dual function

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At	~ 24/~ 24...240	RE17RAMU RE17RAMUS	0.070/0.154 0.060/0.132
	H, Ht	~ 24/~ 24...240	RE17RHMU RE17RHMUS	0.070/0.154 0.060/0.132
	L, Li	~ 24/~ 24...240	RE17RLMU RE17RLMUS	0.070/0.154 0.060/0.132
		~ 12	RE17RLJU	0.070/0.154

Multifunction

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, D, Di, Ac, Bw	~ 12	RE17RMJU	0.070/0.154
		~ 24/~ 24...240	RE17RMMU RE17RMMUS	0.070/0.154 0.060/0.132
		~ 12...240	RE17RMMW RE17RMMWS	0.070/0.154 0.060/0.132
	Ad, Ah, N, O, P, Pt, Ti, Tt, W	~ 24/~ 24...240	RE17RMXMU RE17RMXMUS	0.070/0.154 0.060/0.132

1 s, 10 s, 1 min, 10 min, 1 h, 10 h	A, At, B, C, H, Ht, D, Di	~ 24/~ 24...240	RE17RMEMU RE17RMEMUS	0.070/0.154 0.060/0.132
-------------------------------------	---------------------------	-----------------	---	----------------------------

NFC Timing relays with relay output

Multifunction

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight kg/lb
			V		
0.05 s to 999 h	A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Di, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, Ti, Tt, W	2	~ 24...240	RENF22R2MMW	0.0904/0.1993

Note: References ending with "S" are spring terminals; references without "S" are screw terminals.
Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal.

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Modular timing relays with diagnostic button and dial pointer, relay output, width 22.5 mm/0.886 in.

Output 1 CO and 2 CO contacts

- Multifunction, dual function, or single function
- Multiple timing ranges (up to 10 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option
- Diagnostic button (1) and dial pointer LED indicator



RE22R2QTMR



RE22R2KMR



RE22R2QEMR



RE22R2HMR



RE22R1MYMR

Modular timing relays with relay output

Single function

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight
			V		
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	Ac	2	≈ 24...240	RE22R2ACMR	0.105/ 0.231
	Qg	2	≈ 24...240	RE22R2QGMR	0.105/ 0.231
	Qt	2	≈ 24...240	RE22R2QTMR	0.105/ 0.231
7 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 10 min	K	1	≈ 24...240	RE22R1KMR (1) (2)	0.100/ 0.220
		2	≈ 24...240	RE22R2KMR (1) (2)	0.100/ 0.220
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	Qc	1	≈ 24/≈ 24...240	RE22R1QCMU	0.080/ 0.176
	Single range selection 30 s	Qe	2	≈ 24...240	RE22R2QEMR
		2	≈ 380...415	RE22R2QEMT	0.090/ 0.198

Dual function

10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	A, Aw	1	≈ 24...240	RE22R1AMR	0.100/ 0.220
		2	≈ 24...240	RE22R2AMR	0.105/ 0.231
	C, Ct	1	≈ 24...240	RE22R1CMR	0.100/ 0.220
	C	2	≈ 24...240	RE22R2CMR	0.105/ 0.231
	Ac, Act	1	≈ 24...240	RE22R1ACMR	0.100/ 0.220
	Ak, Akt	1	≈ 24...240	RE22R1AKMR	0.100/ 0.220
	D, Dw	1	≈ 24...240	RE22R1DMR	0.100/ 0.220
		2	≈ 24...240	RE22R2DMR	0.105/ 0.231
	H, Hw	1	≈ 24...240	RE22R1HMR	0.100/ 0.220
		2	≈ 24...240	RE22R2HMR	0.105/ 0.231
Wt, W	2	≈ 24...240	RE22R2MWMR	0.105/ 0.231	
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	K, He	1	≈ 24...240	RE22R1MKMR (1) (2)	0.100/ 0.220
	10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	A, At, Aw	1	≈ 24...240	RE22R1MAMR
A, At, Aw, Ac, Act, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt,		1	≈ 24...240	RE22R1MYMR	0.100/ 0.220
A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt		2	≈ 24...240	RE22R2MYMR	0.105/ 0.231
L, Li, Lt, Lit		1	≈ 24...240	RE22R1MLMR	0.100/ 0.220

(1) The diagnostic button is not available for the K function related references (RE22R1KMR, RE22R2KMR, and RE22R1MKMR).

(2) 1 or 2 relay outputs: 5 A - 250 V.

Harmony Timer Relays

Near Field Communication and conventional Timer Relays
Modular timing relays, relay output, width 22.5 mm/0.886 in.

Output 1 CO and 2 CO contacts

- Multifunction, dual function, or single function
- Multiple timing ranges (7 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE22R1QMU



RE22R2AMU



RE22R2MXMU

Modular timing relays with relay output

Single function

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight
			V		kg/lb
7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	Q	1	≡ 24/∼ 24...240	RE22R1QMU	0.090/ 0.198
			∼ 230/380	RE22R1QMQU	0.090/ 0.198

Dual function

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At	2	≡ 24/∼ 24...240	RE22R2AMU	0.090/ 0.198
--	-------	---	-----------------	-----------	-----------------

Multifunction

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, Di, D, Ac, Bw	2	≡ 24/∼ 24...240	RE22R2MMU	0.090/ 0.198
			∼ 12	RE22R2MJU	0.090/ 0.198
			∼ 12...240	RE22R2MMW	0.090/ 0.198
Ad, Ah, N, O, P, Pt, Tl, Tt, W		2	≡ 24/∼ 24...240	RE22R2MXMU	0.090/ 0.198

Harmony Timer Relays

Near Field Communication and conventional Timer Relays

Miniature plug-in timing relays, relay output

Output 2 CO and 4 CO contacts

- Miniature and plug-in (21 x 27 mm/0.827 x 1.062 in.)
- Single function: function A = delay on energization
- Rated current ~ 5 A
- 7 timing ranges (0.1 s to 100 h)
- Multivoltage
- Excellent immunity to interference
- Power on and relay energized indication by 2 LEDs



REXL2TM●●



REXL4TM●●



RXZE2M114

Miniature plug-in timing relays with relay output

Single function

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight	
			V		kg/lb	
7 switchable ranges 0.1 s...1 s 1 s...10 s 0.1 min...1 min 1 min...10 min 0.1 h...1 h 1 h...10 h 10 h...100 h	A	2	--- 12	REXL2TMJD	0.050/ 0.110	
			--- 24	REXL2TMBD	0.050/ 0.110	
			~ 24 (50/60 Hz)	REXL2TMB7	0.050/ 0.110	
			~ 120 (50/60 Hz)	REXL2TMF7	0.050/ 0.110	
			~ 230 (50/60 Hz)	REXL2TMP7	0.050/ 0.110	
			4	--- 24 (1)	REXL4TMBD	0.050/ 0.110
			~ 24 (50/60 Hz) (1)	REXL4TMB7	0.050/ 0.110	
~ 120 (50/60 Hz)	REXL4TMF7	0.050/ 0.110				
~ 230 (50/60 Hz)	REXL4TMP7	0.050/ 0.110				

Sockets for relays

Contact terminal arrangement	For use with relays	Connection	Unit reference (2)	Weight kg/lb
Mixed (3)	REXL2TM●●, REXL4TM●●	Screw clamp	RXZE2M114 (5)	0.048/ 0.106
	REXL2TM●●, REXL4TM●●	Connector	RXZE2M114M (6)	0.056/ 0.123
Separate (4)	REXL2TM●●	Connector	RXZE2S108M	0.070/ 0.154
	REXL4TM●●	Connector	RXZE2S114M	0.058/ 0.128
	REXL2TM●●, REXL4TM●●	Spring clamp	RXZE2S114S	0.070/ 0.154

(1) For --- 48 V supply, additional resistor 560 Ω 2 W/--- 24 V.
For ~ 48 V, additional resistor 390 Ω 4 W/~ 24 V.

(2) These products are sold in lots of 10.

(3) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

(4) The inputs and outputs are separated from the relay power supply.

(5) Thermal current I_{th}: 10 A

(6) Thermal current I_{th}: 12 A

Harmony Timer Relays

Near Field Communication and conventional Timer Relays


Electronic timing relays, relay output, 48 x 48 mm

Output 2 CO contacts

- Time unit selector knob
- Multifunction, single function, or dual function
- Multirange
- Multivoltage
- 2 relay outputs, 5 A
- Panel-mounted or plug-in
- LED indication



RE48ATM12MW



RE48AMH13MW



RUZC3M



RE48ASOC11AR



RE48ASOC11SOLD



RE48ASETCOV



RE48AIPCOV

Electronic Timing relays with relay output

8-pin relay

Timing ranges	Function	No. of relay outputs	Voltages	Reference	Weight
			V		kg/lb
1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h	A	2	≈ 24...240	RE48ATM12MW	0.140/ 0.309
	A1, A2, H1, H2	2 of which 1 instantaneous	≈ 24...240	RE48AMH13MW	0.140/ 0.309

11-pin relay

1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h	L, Li	2	≈ 24...240	RE48ACV12MW	0.140/ 0.309
	A, B, C, Di	2	≈ 24...240	RE48AML12MW	0.140/ 0.309

Sockets

Description	Number of pins	For use with relays	Sold in lots of	Unit reference	Weight
IP 20 sockets with connection by connector and mixed contact terminals (1)	8	RE48ATM12MW, RE48AMH13MW	10	RUZC2M	0.054/ 0.119
	11	RE48ACV12MW, RE48AML12MW	10	RUZC3M	0.054/ 0.119
IP 20 socket with screw terminal connections on rear face	11	RE48ACV12MW, RE48AML12MW	1	RE48ASOC11AR	–

Connectors and protective cover

IP 20 solder connectors	11	RE48ACV12MW, RE48AML12MW	1	RE48ASOC11SOLD	–
Setting protection cover	–	RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW	1	RE48ASETCOV	–
Protective cover IP 64	–	RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW	1	RE48AIPCOV	–

(1) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

R			
RE17LAMW	19	RE48ASETCOV	23
RE17LAMWS	19	RE48ASOC11AR	23
RE17LCBM	19	RE48ASOC11SOLD	23
RE17LCBMS	19	RE48ATM12MW	23
RE17LHBM	19	RENF22R2MMW	19
RE17LLBM	19	REXL2TMB7	22
RE17LLBMS	19	REXL2TMBD	22
RE17LMBM	19	REXL2TMF7	22
RE17RAMU	19	REXL2TMJD	22
RE17RAMUS	19	REXL2TMP7	22
RE17RBMU	19	REXL4TMB7	22
RE17RCMU	19	REXL4TMBD	22
RE17RCMUS	19	REXL4TMF7	22
RE17RHMU	19	REXL4TMP7	22
RE17RHMUS	19	RUZC2M	23
RE17RLJU	19	RUZC3M	23
RE17RLMU	19	RXZE2M114	22
RE17RLMUS	19	RXZE2M114M	22
RE17RMEMU	19	RXZE2S108M	22
RE17RMEMUS	19	RXZE2S114M	22
RE17RMJU	19	RXZE2S114S	22
RE17RMMU	19		
RE17RMMUS	19		
RE17RMMW	19		
RE17RMMWS	19		
RE17RMXMU	19		
RE17RMXMUS	19		
RE22R1ACMR	20		
RE22R1AKMR	20		
RE22R1AMR	20		
RE22R1CMR	20		
RE22R1DMR	20		
RE22R1HMR	20		
RE22R1KMR	20		
RE22R1MAMR	20		
RE22R1MKMR	20		
RE22R1MLMR	20		
RE22R1MYMR	20		
RE22R1QCMU	20		
RE22R1QMQ	21		
RE22R1QMU	21		
RE22R2ACMR	20		
RE22R2AMR	20		
RE22R2AMU	21		
RE22R2CMR	20		
RE22R2DMR	20		
RE22R2HMR	20		
RE22R2KMR	20		
RE22R2MJU	21		
RE22R2MMU	21		
RE22R2MMW	21		
RE22R2MWMR	20		
RE22R2MXMU	21		
RE22R2MYMR	20		
RE22R2QEMR	20		
RE22R2QEMT	20		
RE22R2QGMR	20		
RE22R2QTMR	20		
RE48ACV12MW	23		
RE48AIPCOV	23		
RE48AMH13MW	23		
RE48AML12MW	23		

mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

Watch the How-to Videos



Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



Support

- > [Get Quicker Answers Thanks to Online Support](#)

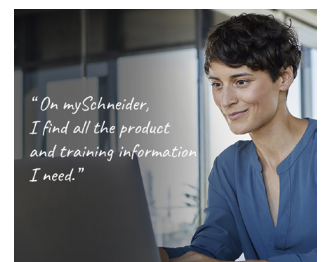

Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

Schneider
Electric

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.

SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at
www.se.com/Harmony Timer Relays

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA5ED2130103EN
May 2024 - V12.2